


## Locking Clamp ROV Shackle Green Pin® P-5365

### Product information

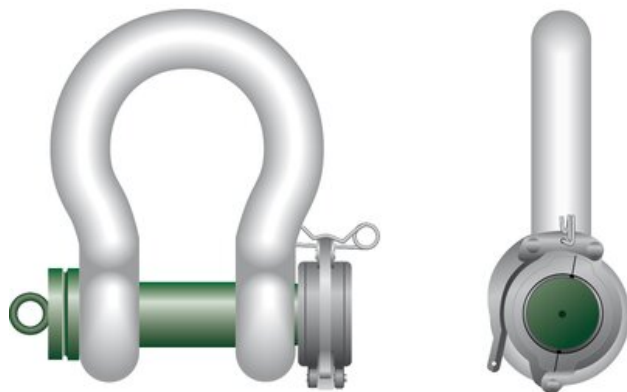

The Green Pin® Locking Clamp ROV Shackle is perfect for release operations with a remotely operated vehicle (ROV). The grade 8 shackle has been specially developed for sub-sea applications and is easy to handle for the ROV pilot. The Green Pin® Locking Clamp ROV Shackle has a powerful locking system which ensures that the load will not be released before you want it to. The white coating of the Green Pin® Locking Clamp ROV Shackle optimizes visibility under water and ensures its long-term durability. The ROV shackle is available in a range with a working load limit from 6.5 up to 250 ton.

Certification on request: 2.1, 2.2, 3.1, MTCa, MTCb, LROS

**Safety factor:** 6:1 up to WLL 85 ton. 5:1 for 120 ton and up.

**Material:** Bow and pin alloy steel

**Marking:** CE-marked

**Temperature range:** -60°C up to +200°C

**Finish:** Bow white painted, pin green painted

**Note:** Supplied without wires; design your own wiring plan

**Grade:** 8

<b>WLL ton</b>	<b>a mm</b>	<b>b mm</b>	<b>c mm</b>	<b>d mm</b>	<b>e mm</b>	<b>f mm</b>	<b>g mm</b>	<b>h mm</b>	<b>i mm</b>	<b>j mm</b>	<b>k mm</b>	<b>Weight kg</b>
6.5	22	25	52	22	36	83	58	164	140	102	45	2.27
9.5	28	32	66	28	47	108	75	200	172	131	48	4.25
12	32	35	72	32	51	115	83	213	184	147	48	5.36
17	38	42	88	38	60	146	99	266	209	175	48	9.27
25	45	50	103	45	74	178	126	309	243	216	48	14.62
35	50	57	116	50	83	197	138	350	269	238	48	20.75
42.5	57	65	130	57	95	222	160	377	301	274	48	28.33
55	65	70	145	65	105	260	180	440	329	310	48	41
85	75	83	162	75	127	329	190	527	375	340	48	61
120	95	95	208	91	147	400	238	647	440	428	60	110
150	105	108	238	102	169	410	275	688	490	485	60	160
200	120	130	279	113	179	513	290	838	520	530	60	235
250	130	140	299	118	205	554	305	904	560	565	60	285

# Blueprint

