


Anchor Point ABS-Lock X-H-16

Product information

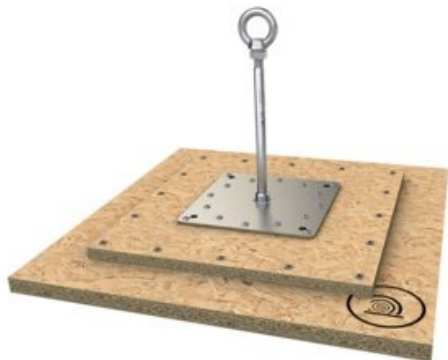

Stainless steel anchor point ABS-Lock X-H-16 (Ø 16 mm) is a fall protection solution for screwing onto OSB or wooden panelling. It is equipped with a base plate (200 x 200 mm) and screwed straight onto the wooden panelling using 16 stainless steel screws. Standard package includes 16 high-quality screws and installation set.
Add a supporting tube for usage as an end or corner post in a lifeline system.

Force directions: Lateral

Substructure: Wood

Attachment: Screwed

Application: Flat roofs

Material: Stainless Steel

Marking: According to standard, CE-marked, Safety Instructions, Supplier symbol, Batch Nr., Standards, Max No of users, Serial Nr.

Standard: EN 795, CEN/TS/16415

Part code	Max. number of persons	Length mm
19.10LX-H-150-16	3	150
19.10LX-H-300-16	3	300
19.10LX-H-400-16	3	400
19.10LX-H-500-16	3	500
19.10LX-H-600-16	3	600