



Steel Wire Rope Ropetex PERFORM 35C

Product information

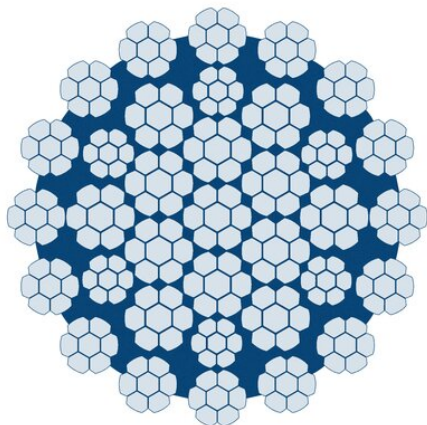

ROPETEX



Ropetex PERFORM 35C is a flexible high-quality rotation resistant steel wire rope. The strands are compacted giving it a high breaking load and making it wear resistant. Ropetex PERFORM 35C is very well suited for multi-layer spooling.

Key product benefits

- Rotation resistant steel wire rope
- Excellent lifetime
- Suitable for multi-layer drum spooling
- Very resistant against crushing
- Very wear resistant
- High breaking load (MBL)

Main applications

- Hoist ropes
- Auxiliary hoist ropes

Rope Category Number acc. to ISO4309:2017: 23-2

[... Read more](#)

Rope construction: 35xK7WS

Marking: According to standard

Temperature range: -40°C up to +60°C with standard lubricant, wider range on request

Standard: EN 12385-4

Fill factor: 0,72

RCN: 23-2

Tolerance Ø: +2% to +4%

Tower crane



Truck crane



Mobile port crane



Mobile port crane



Offshore crane



Offshore crane



Crawler crane



Crawler crane



Luffing crane



Self-erected crane



Piling crane



Truck crane



Steel Wire Rope Ropetex PERFORM 35C

Offshore crane



Deck crane



Knuckle boom crane



Winch rope



Steel Wire Rope Ropetex PERFORM 35C

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m	CO ₂ e kg
104100806270012	8	1,960	Galvanized	zZ	60.9	36.4	A-2	32	1.29
104100806300012	8	2,160	Galvanized	zZ	63.1	36.4	A-2	32	1.29
104100906270012	9	1,960	Galvanized	zZ	76.9	46.1	A-2	40	1.61
104100906300012	9	2,160	Galvanized	zZ	79.6	46.1	A-2	40	1.61
104101006270012	10	1,960	Galvanized	zZ	94.7	56.9	A-2	50	2.01
104101006300012	10	2,160	Galvanized	zZ	98	56.9	A-2	50	2.01
104101106270012	11	1,960	Galvanized	zZ	114	68.8	A-2	60	2.42
104101106300012	11	2,160	Galvanized	zZ	118.8	68.8	A-2	60	2.42
104101206270012	12	1,960	Galvanized	zZ	135.4	81.9	A-2	72	2.9
104101206300012	12	2,160	Galvanized	zZ	140.6	81.9	A-2	72	2.9
104101306270012	13	1,960	Galvanized	zZ	159.8	96.2	A-2	84	3.38
104101306300012	13	2,160	Galvanized	zZ	169.7	96.2	A-2	84	3.38
104101406270012	14	1,960	Galvanized	zZ	185.3	115.5	A-2	98	3.95
104101406300012	14	2,160	Galvanized	zZ	193.1	115.5	A-2	98	3.95
104101506270012	15	1,960	Galvanized	zZ	213.3	128	A-2	112	4.51
104101506300012	15	2,160	Galvanized	zZ	220.8	128	A-2	112	4.51
104101606270012	16	1,960	Galvanized	zZ	242.3	145.7	A-2	127	5.12
104101606300012	16	2,160	Galvanized	zZ	251.5	145.7	A-2	127	5.12
104101806270012	18	1,960	Galvanized	zZ	306.4	184.3	A-2	158	6.37
104101806300012	18	2,160	Galvanized	zZ	318.8	184.3	A-2	158	6.37
104102006270012	20	1,960	Galvanized	zZ	377.7	227.6	A-2	198	7.98
104102006300012	20	2,160	Galvanized	zZ	393	227.6	A-2	198	7.98
104102106270012	21	1,960	Galvanized	zZ	417.4	250.9	A-2	218	8.78
104102106300012	21	2,160	Galvanized	zZ	433.6	250.9	A-2	218	8.78
104102206270012	22	1,960	Galvanized	zZ	458.1	275.4	A-2	240	9.67
104102206300012	22	2,160	Galvanized	zZ	475.2	275.4	A-2	240	9.67
104102306270012	23	1,960	Galvanized	zZ	499.8	301	A-2	262	10.56
104102306300012	23	2,160	Galvanized	zZ	520.7	301	A-2	262	10.56
104102406270012	24	1,960	Galvanized	zZ	544.6	327.7	A-2	285	11.48
104102406300012	24	2,160	Galvanized	zZ	566.3	327.7	A-2	285	11.48
104102506270012	25	1,960	Galvanized	zZ	590.4	355.6	A-2	310	12.49

Steel Wire Rope Ropetex PERFORM 35C

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m	CO ₂ e kg
104102506300012	25	2,160	Galvanized	zZ	615.8	355.6	A-2	310	12.49
104102606270012	26	1,960	Galvanized	zZ	639.3	384.6	A-2	334	13.46
104102606300012	26	2,160	Galvanized	zZ	665.3	384.6	A-2	334	13.46
104102806270012	28	1,960	Galvanized	zZ	741.1	446.1	A-2	388	15.63
104102806300012	28	2,160	Galvanized	zZ	772.2	446.1	A-2	388	15.63
104103006270012	30	1,960	Galvanized	zZ	851	512.1	A-2	445	17.93
104103006300012	30	2,160	Galvanized	zZ	886.1	512.1	A-2	445	17.93
104103206270012	32	1,960	Galvanized	zZ	967.1	582.6	A-2	506	20.39
104103206300012	32	2,160	Galvanized	zZ	1,007.8	582.6	A-2	506	20.39
104103406270012	34	1,960	Galvanized	zZ	1,094.4	657.2	A-2	572	23.04
104103406300012	34	2,160	Galvanized	zZ	1,138.5	657.2	A-2	572	23.04
104103606270012	36	1,960	Galvanized	zZ	1,234.7	737.4	A-2	641	25.82
104103606300012	36	2,160	Galvanized	zZ	1,276.1	737.4	A-2	641	25.82
104103806270012	38	1,960	Galvanized	zZ	1,366.2	821.6	A-2	714	28.77
104103806300012	38	2,160	Galvanized	zZ	1,421.6	821.6	A-2	714	28.77