


Stainless Steel Wire Rope SS 6x7-WSC

Product information

SZ zS SS*

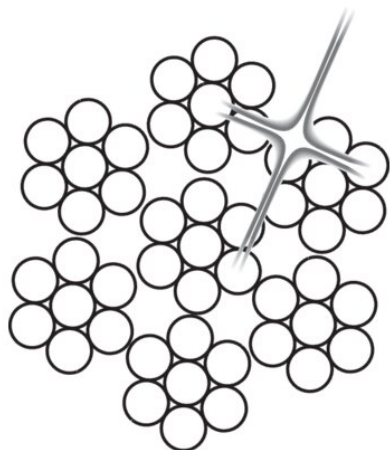

Typical applications: Rigging, stays, controls and signalling devices.

[... Read more](#)

Material: AISI 316.

Marking: According to standard

Standard: EN 12385-4

Fill factor: 0.55

General use



Stay rope



Stainless Steel Wire Rope SS 6x7-WSC

Technical data

| Part code | Rope diameter | Tensile strength N/mm ² | Finish | Rope lay | Min. breaking force kN | Steel area mm ² | Lubrication | Weight kg/100m |
|---------------|---------------|---------------------------------------|-----------|----------|---------------------------|-------------------------------|-------------|-------------------|
| 01.S10049010D | 1 | 1,570 | Stainless | sZ | 0.61 | 0.43 | No-Lube | 0.38 |
| 01.S20049010D | 1 | 1,570 | Stainless | zS | 0.61 | 0.43 | No-Lube | 0.38 |
| 01.S10049015D | 1.5 | 1,570 | Stainless | sZ | 1.37 | 0.97 | No-Lube | 0.86 |
| 01.S20049015D | 1.5 | 1,570 | Stainless | zS | 1.37 | 0.97 | No-Lube | 0.86 |
| 01.S10049018D | 1.8 | 1,570 | Stainless | sZ | 1.97 | 1.4 | No-Lube | 1.2 |
| 01.S10049020D | 2 | 1,570 | Stainless | sZ | 2.44 | 1.73 | No-Lube | 1.54 |
| 01.S20049020D | 2 | 1,570 | Stainless | zS | 2.44 | 1.73 | No-Lube | 1.54 |
| 01.S10049025D | 2.5 | 1,570 | Stainless | sZ | 3.81 | 2.7 | No-Lube | 2.4 |
| 01.S20049025D | 2.5 | 1,570 | Stainless | zS | 3.81 | 2.7 | No-Lube | 2.4 |
| 01.S10049030D | 3 | 1,570 | Stainless | sZ | 5.48 | 3.89 | No-Lube | 3.46 |
| 01.S20049030D | 3 | 1,570 | Stainless | zS | 5.48 | 3.89 | No-Lube | 3.46 |
| 01.S10049040D | 4 | 1,570 | Stainless | sZ | 9.75 | 6.91 | No-Lube | 6.14 |
| 01.S20049040D | 4 | 1,570 | Stainless | zS | 9.75 | 6.91 | No-Lube | 6.14 |
| 01.S10049050D | 5 | 1,570 | Stainless | sZ | 15.2 | 10.8 | No-Lube | 9.6 |
| 01.S10049060D | 6 | 1,570 | Stainless | sZ | 21.9 | 15.6 | No-Lube | 13.8 |
| 01.S10049070D | 7 | 1,570 | Stainless | sZ | 29.8 | 21.2 | No-Lube | 18.8 |
| 01.S10049080D | 8 | 1,570 | Stainless | sZ | 39 | 27.6 | No-Lube | 24.6 |
| 01.S10049090D | 9 | 1,570 | Stainless | sZ | 49.3 | 35 | No-Lube | 31.1 |
| 01.S10049100D | 10 | 1,570 | Stainless | sZ | 60.9 | 43.2 | No-Lube | 38.4 |
| 01.S10049110D | 11 | 1,570 | Stainless | sZ | 73.7 | 52.3 | No-Lube | 46.5 |
| 01.S10049120D | 12 | 1,570 | Stainless | sZ | 87.7 | 62.2 | No-Lube | 55.3 |
| 01.S10049130D | 13 | 1,570 | Stainless | sZ | 103 | 73 | No-Lube | 64.9 |
| 01.S10049140D | 14 | 1,570 | Stainless | sZ | 119 | 84.7 | No-Lube | 75.3 |
| 01.S10049150D | 15 | 1,570 | Stainless | sZ | 137 | 97.2 | No-Lube | 86.4 |
| 01.S10049160D | 16 | 1,570 | Stainless | sZ | 156 | 111 | No-Lube | 98.3 |
| 01.S10049180D | 18 | 1,570 | Stainless | sZ | 197 | 140 | No-Lube | 124 |
| 01.S10049200D | 20 | 1,570 | Stainless | sZ | 244 | 173 | No-Lube | 154 |