


## Roundsling Assembly RR-276

---

### Product information

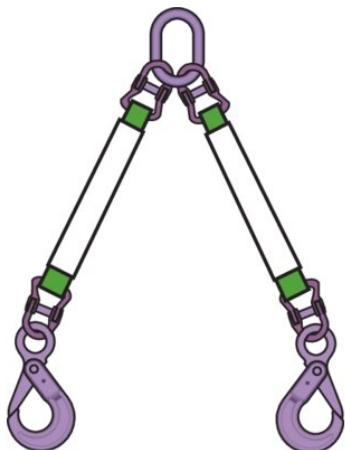

**Design:** Roundsling covered with extra protection sleeve and provided with strengthen eye in each end, assembled as a tool in combination with lifting details in grade 8. Max manufacturing length 20 m.

**Stretch with working load:** 2-3%.

**Length tolerance:** Nominal length  $\pm 2\%$ .

**Safety factor:** Forge 4:1 and round sling 7:1

... [Read more](#)

---

**Material:** Polyester. Resistant to most acids but not strong alkalizes.

**Marking:** According to standard, The slings are provided with a label with manufacturer's symbol, working load limit (WLL) and CE marking.

**Temperature range:** app.  $-40^{\circ}$  -  $+100^{\circ}\text{C}$ .

**Standard:** EN 1492-2

**Grade:** 10

## Roundsling Assembly RR-276

### Technical data

Part code	WLL ton	Colour
RR27601	1.4	Violet
RR27602	2.8	Green
RR27603	4.2	Yellow
RR27604	5.6	Grey
RR27605	7	Red
RR27606	8.4	Brown
RR27608	11.2	Blue
RR27610	14	Orange