


Roundsling Assembly RR-376

Product information

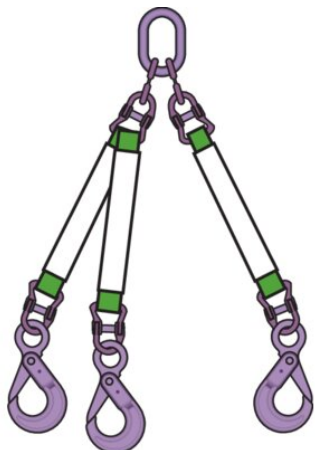

Design: Roundsling covered with extra protection sleeve and provided with strengthen eye in each end, assembled as tool in combination with lifting details in grade 8. Max manufacturing length 20 m.

Stretch with working load: 2-3%.

Length tolerance: Nominal length $\pm 2\%$.

Safety factor: Forge 4:1 and round sling 7:1.

[... Read more](#)

Material: Polyester. Resistant to most acids but not strong alkalizes.

Marking: According to standard, The slings are provided with a label with manufacturer's symbol, working load limit (WLL) and CE marking.

Temperature range: app. -40° - $+100^{\circ}\text{C}$.

Standard: EN 1492-2

Grade: 10

Roundsling Assembly RR-376

Technical data

Part code	WLL ton	Colour
RR37601	2.1	Violet
RR37602	4.2	Green
RR37603	6.3	Yellow
RR37604	8.4	Grey
RR37605	10.5	Red
RR37606	12.6	Brown
RR37608	16.8	Blue
RR37610	21	Orange