


Round Sling Extreema® XS

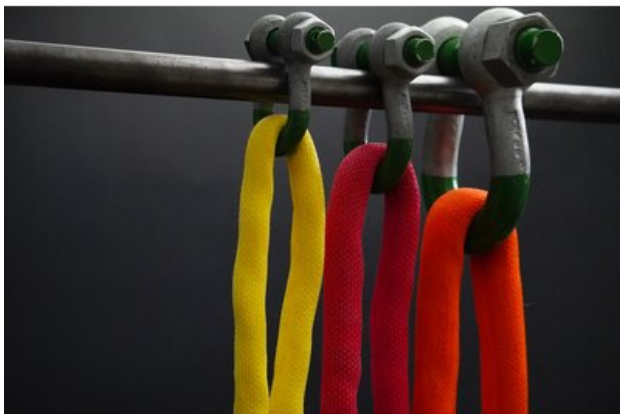

Product information

The Extreema® XS sling is a compact high-strength round sling designed for lifting operations in confined or restricted spaces. It is used where traditional slings are too bulky or require larger hardware. Manufactured from HMPE, it combines high load capacity with a small diameter, enabling efficient and controlled lifting in tight environments.

WLL range: 3 – 20t

EWL range: 0,5m – 16m, (15t/20t can be made up to 65m)

When to choose this product

Best for:

- Lifting in confined spaces with limited clearance
- Applications requiring compatibility with standard shackles

Product benefits

- Compact diameter enables lifting in restricted or hard-to-reach areas
- D:d ratio 1:1 allows use with standard bow shackles
- HMPE construction provides high strength with low weight
- Lightweight design simplifies transport, handling, and storage
- Seamless sleeve supports durability and extended service life

Material: HMPE

Marking: According to standard, CE-marked

Temperature range: -40°C up to +70°C

Standard: EN 1492-2

except material

Safety factor: 7:1

Part code	WLL ton	EWL m	Colour
12.20EXHL030005	3	0.5	Yellow

12.20EXHL0300075	3	0.75	Yellow
12.20EXHL030010	3	1	Yellow
12.20EXHL030015	3	1.5	Yellow
12.20EXHL030020	3	2	Yellow
12.20EXHL030025	3	2.5	Yellow
12.20EXHL030030	3	3	Yellow
12.20EXHL030040	3	4	Yellow
12.20EXHL030050	3	5	Yellow
-	3	6	Yellow
12.20EXHL050005	5	0.5	Red
12.20EXHL050010	5	1	Red
12.20EXHL050015	5	1.5	Red
12.20EXHL050020	5	2	Red
12.20EXHL050025	5	2.5	Red
12.20EXHL050030	5	3	Red
12.20EXHL050040	5	4	Red
12.20EXHL050050	5	5	Red
-	5	6	Red
12.20EXHL100015	10	1.5	Orange
12.20EXHL100020	10	2	Orange
12.20EXHL100030	10	3	Orange
12.20EXHL100040	10	4	Orange
12.20EXHL100050	10	5	Orange

10

6

Orange

10

0.5

Orange

Technical data

Extreema® XS roundsling				
HMPE EXS				
WLL	SF	Core ø mm	Weight kg 3m EWL	p/m extra kg
3t	7	9	0,8	0,25
5t	7	14	1,35	0,43
10t	7	23	2	0,65
15t	7	31	3,5	1,15
20t	7	37	4,6	1,50