


Steel Wire Rope 6x19S-IWRC

Product information

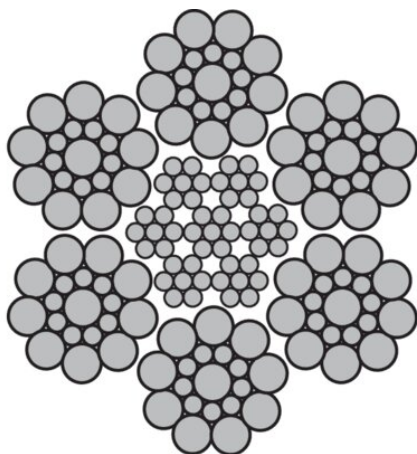

Typical applications: Skidding winches.

Standard: EN 12385-4.

Design: Ordinary right hand lay.

Fill factor: 0,57

ISO 4309 Rope Category No: All Diameters RCN.02

... [Read more](#)

Rope construction: 6x19S-IWRC

Marking: According to standard

Finish: Galvanized.

Standard: EN 12385-4

Fill factor: 0.57

RCN: 02

Steel Wire Rope 6x19S-IWRC

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
01.G10163050G-S	5	1,960	Galvanized	sZ	17.4	11.2	SupplierStandard	10
01.G10163060G-S	6	1,960	Galvanized	sZ	25.1	16.2	SupplierStandard	14.4
01.G10163080G-S	8	1,960	Galvanized	sZ	44.7	28.7	SupplierStandard	25.6
01.G10163100G-S	10	1,960	Galvanized	sZ	69.8	44.9	SupplierStandard	40
01.G10163120G-S	12	1,960	Galvanized	sZ	100	64.7	SupplierStandard	57.6
01.G10163140G-S	14	1,960	Galvanized	sZ	137	88	SupplierStandard	78.4