

## BLCW special grab

---

### Product information



### General:


For vertical lifting and moving of various materials as steel, wood, plastic, concrete, marble etc. which have parallel sides. The clamp is locked in the open position. To perform lifting, the operator must activate the handle and hold it up while the force on the lifting eye is going upwards. When laying down the load, the clamp automatically unlocks itself to open.

The pads are covered with special plastic to avoid damage of contact surfaces  
... [Read more](#)

---

## BLCW special grab

### Blueprint

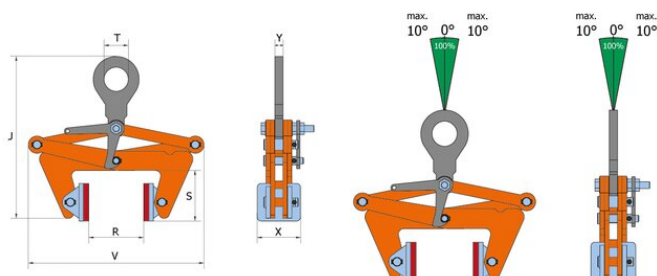

### Technical data

| Part code       | Code       | WLL ton | Beam width | S mm | T mm | U mm    | V mm    | X mm      | Y mm | Weight kg |
|-----------------|------------|---------|------------|------|------|---------|---------|-----------|------|-----------|
| 16.01BLCW 0.5 t | BLCW 0.5 t | 0.5     | 30-110     | 95   | 45   | 305-460 | 270-325 | 80 (*70)  | 15   | 7         |
| 16.01BLCW 1 t   | BLCW 1 t   | 1       | 100-230    | 120  | 45   | 380-655 | 425-530 | 80 (*70)  | 15   | 12.3      |
| 16.01BLCW 2 t   | BLCW 2 t   | 2       | 220-360    | 140  | 45   | 410-735 | 580-675 | 80 (*70)  | 15   | 18        |
| 16.01BLCW 3 t   | BLCW 3 t   | 3       | 350-500    | 178  | 64   | 530-900 | 725-835 | 100 (*90) | 16   | 33        |