MENNENS | Lifting Solutions Group
Axel Johnson International

7x19 RVS

Productinformatie

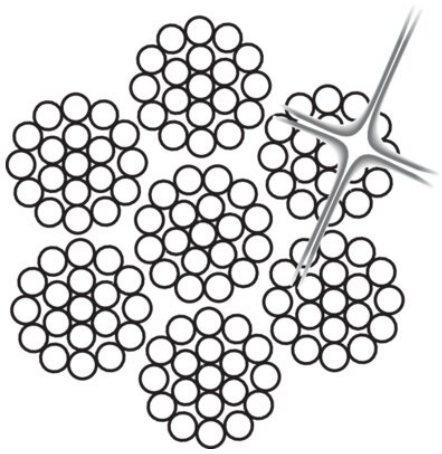

Lierkabel



Tuikabel



Bovenloop-kraan



Land- en tuinbouw



Stroppen-kabel



Steel wire rope 6x19 WSC in stainless steel is a good choice for basic lifting applications in environments where corrosion resistance is important. It is equipped with a Wire Strand Core (WSC) which gives the rope a good strength and a reasonable balance between fatigue and wear resistance. Can be used for applications where the rope runs over sheaves or is spooled on a drum.

... *Read more*

Staalkabelconstructie: 6x19M+WSC (7x19)
Materiaal: AISI 316
Markering: Volgens norm
Temperatuursbereik: -40°C t/m +200°C
Norm: EN 12385-4
except material

Vulfactor: 0,53
RCN: 04

Mennens Nederland
website@mennens.nl
+31 (0)10 4373033

© November 2026 - All Rights Reserved

MENNENS | Lifting Solutions Group
Axel Johnson International

7x19 RVS

Technische gegevens

Artikelnr.	Kabel Ø mm	Treksterkte N/mm²	Afwerking	Slagwijze	MBF (kN)	Materiaaldoorsnede mm²	Lubrication	Gewicht kg/100m
108100154620138	1,5	1.570	Roestvrij	sZ	1,28	0,94	No-Lube	0,86
108100204620138	2	1.570	Roestvrij	sZ	2,27	1,67	No-Lube	1,52
108100304620138	3	1.570	Roestvrij	sZ	5,12	3,76	No-Lube	3,43
108100404620138	4	1.570	Roestvrij	sZ	9,09	6,69	No-Lube	6,1
108100504620138	5	1.570	Roestvrij	sZ	14,2	10,5	No-Lube	9,53
108100604620138	6	1.570	Roestvrij	sZ	20,5	15	No-Lube	13,7
108100704620138	7	1.570	Roestvrij	sZ	27,8	20,5	No-Lube	18,7
108100804620138	8	1.570	Roestvrij	sZ	36,4	26,8	No-Lube	24,4
108100803620138	8	1.570	Roestvrij	zS	36,4	26,8	No-Lube	24,4
108100904620138	9	1.570	Roestvrij	sZ	46	33,9	No-Lube	30,9
108101004620138	10	1.570	Roestvrij	sZ	56,8	41,8	No-Lube	38,1
108101003620138	10	1.570	Roestvrij	zS	56,8	41,8	No-Lube	38,1
108101104620138	11	1.570	Roestvrij	sZ	68,8	50,6	No-Lube	46,1
108101204620138	12	1.570	Roestvrij	sZ	81,8	60,2	No-Lube	54,9
108101304620138	13	1.570	Roestvrij	sZ	96	70,6	No-Lube	64,4
108101404620138	14	1.570	Roestvrij	sZ	111	81,9	No-Lube	74,7
108101504620138	15	1.570	Roestvrij	sZ	128	94,1	No-Lube	85,7
108101604620138	16	1.570	Roestvrij	sZ	145	107	No-Lube	97,5
108101804620138	18	1.570	Roestvrij	sZ	184	135	No-Lube	123
108102004620138	20	1.570	Roestvrij	sZ	227	167	No-Lube	152

Mennens Nederland
website@mennens.nl
+31 (0)10 4373033

© November 2026 - All Rights Reserved