


8x19S+staalkern

Productinformatie

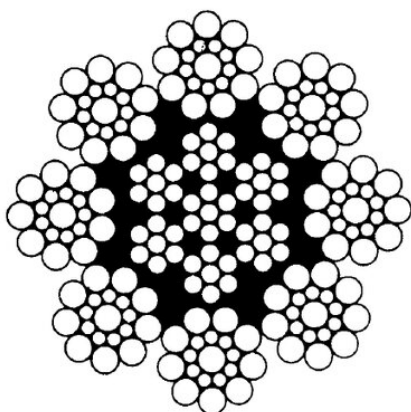

Algemeen: Standaard 8-strengs constructie

[... Read more](#)

Afwerking: Standaard verzinkt maar is ook verkrijgbaar in blank

8x19S+staalkern

| Dia (mm) | MBF 1170N/mm ² (kN) | MBF 1960N/mm ² (kN) | Gewicht (kg/100m) |
|----------|--------------------------------|--------------------------------|-------------------|
| 8 | 40.3 | 44.7 | 26 |
| 9 | 51 | 56.5 | 33 |
| 10 | 63 | 69.8 | 40.7 |
| 11 | 76.2 | 84.4 | 49.2 |
| 12 | 90.7 | 100 | 58.6 |
| 13 | 106 | 118 | 68.8 |
| 14 | 124 | 137 | 79.8 |
| 16 | 161 | 179 | 104 |
| 18 | 204 | 226 | 132 |
| 20 | 252 | 279 | 163 |
| 22 | 305 | 338 | 197 |
| 24 | 363 | 402 | 234 |
| 26 | 426 | 472 | 275 |
| 28 | 494 | 547 | 319 |
| 32 | 645 | 715 | 417 |
| 36 | 817 | 904 | 527 |
| 40 | 1010 | 1120 | 651 |
| 44 | 1220 | 1350 | 788 |
| 48 | 1450 | 1610 | 938 |
| 52 | 1700 | 1890 | 1100 |
| 56 | 1980 | 2190 | 1280 |
| 60 | 2270 | 2510 | 1470 |