


## End feed boxes Click Ductor

### Product information

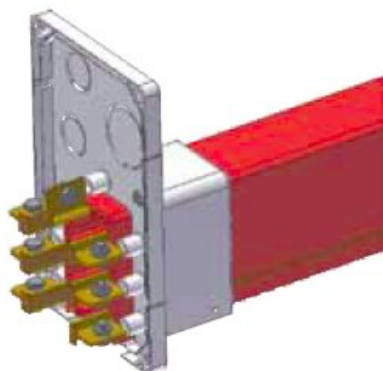

*EB40 (opened)*

#### General:

End feed boxes are used for the connection of the feeder cable to the extreme end of the Click-Ductor system (see picture). All feed boxes are fitted with metric glands. It is possible to use extra glands and/or several diameter ranges from type EB40. End feed clamps are required for connection of copper conductors 125A or 160A (see details below).

#### End feed boxes:

##### Type EBS32

Compact end feed box with cable gland M32, suitable for cables  $\varnothing 10\text{-}\varnothing 21$  mm. Connecting screws M6 included.

##### Type EB40

End feed box for with cable gland M40, suitable for cables  $\varnothing 16\text{-}\varnothing 28$  mm. The pushthrough holes offer easy mounting of various cable glands. Connecting screws M6 included.

**Type EB63** As end feed box EB40, with cable gland M63, suitable for cables  $\varnothing 30\text{-}\varnothing 44,5$  mm.

#### End feed clamps:

##### Type RC-EC80

Required for connecting copper conductors Cu50A or Cu80 to the end feed box. To be ordered separately.

##### Type RC-EC110

Required for connecting copper conductors Cu110 to the end feed box. To be ordered separately.

##### Type RC-EC200

Required for connecting copper conductors 125A, 160A or 200A to the end feed box. Premounted on every Click-Ductor section; no separate ordering required.

### Description

End feed box EBS32 1xM32

End feed box EB40 1xM40

End feed box EB63 1xM63

End feed box EB

End feed clamp RC-EC80

End feed clamp RC-EC110

End feed clamp RC-EC200

### Technical data

---