MENNENS | Lifting Solutions Group
Axel Johnson International

# Steel Wire Rope 6x19S-IWRC

**Product information**

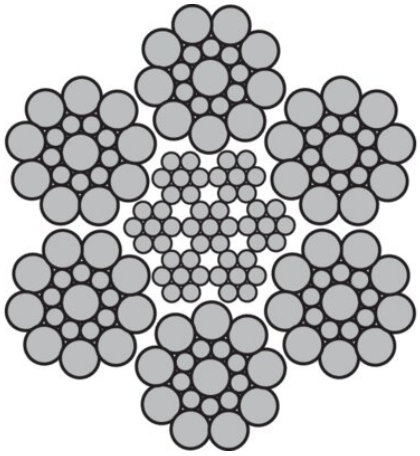

**Typical applications:** Skidding winches.
**Standard:** EN 12385-4.

**Design:** Ordinary right hand lay.

**Fill factor:** 0,57
**ISO 4309 Rope Category No:** All Diameters RCN.02

... *Read more*

**Rope construction:** 6x19S-IWRC
**Marking:** According to standard
**Finish:** Galvanized.
**Standard:** EN 12385-4

**Fill factor:** 0.57
**RCN:** 02

**Mennens Nederland**
website@mennens.nl
+31 (0)10 4373033

© November 2026 - All Rights Reserved

MENNENS | Lifting Solutions Group
Axel Johnson International

# Steel Wire Rope 6x19S-IWRC

## Technical data

| Part code | Rope diameter mm | Tensile strength N/mm² | Finish | Rope lay | Min. breaking force kN | Steel area mm² | Lubrication | Weight kg/100m |
|---|---|---|---|---|---|---|---|---|
| 101100504270229 | 5 | 1,960 | Galvanized | sZ | 17.4 | 11.2 | SupplierStandard | 10 |
| 101100604270229 | 6 | 1,960 | Galvanized | sZ | 25.1 | 16.2 | SupplierStandard | 14.4 |
| 101100804270229 | 8 | 1,960 | Galvanized | sZ | 44.7 | 28.7 | SupplierStandard | 25.6 |
| 101101004270229 | 10 | 1,960 | Galvanized | sZ | 69.8 | 44.9 | SupplierStandard | 40 |
| 101101204270229 | 12 | 1,960 | Galvanized | sZ | 100 | 64.7 | SupplierStandard | 57.6 |
| 101101404270229 | 14 | 1,960 | Galvanized | sZ | 137 | 88 | SupplierStandard | 78.4 |

**Mennens Nederland**
website@mennens.nl
+31 (0)10 4373033

© November 2026 - All Rights Reserved